Generator Trailer Range //

RT1–750kg Single Axle Unbraked Trailer

Trailer chassis is suitable for most brands of generators and other static plant such as tanks, pumps, compressors and other.



Features Benefits

Ready for work rolling chassis

Towable chassis is fully certified and approved and is recorded on a data base in accordance with Regulation 2007/46/EC

Open frame design

The design is approved for various load fastening variations

Chassis is complete with mudguards and rear lights

Simply load and secure your equipment and go

No further testing or certification is required as the standard issue certification satisfies all the elements of trailer legislation and chassis can be legally and safely towed with, or without a pay load

Simply fasten and secure your generator or equipment on and off the chassis with ease

Choose from ratchet straps or nut and bolts fasteners as both are acceptable

Trailer is suitable for UK and Ireland highway use



Maximum towable weight of

750kg

Suitable for most brands of generator up to **15kVA**,* including the following MHM models:

STAGE 5 ENGINE STAGE 3 ENGINE

MG 6000 SSY-5-ECO MG 6000 SSY-5 MG 6000 E/SSY-5 MG 8000 SSKH-5 MG 10000 SSKH-5-ECO MG 10000 SSKH-5-3PH MG 15000 SSY-5-MV MG 6000 SSK MG 8000 SSK MG 10000 SSK-ECO MG 10000 SSK-3PH MG 15000 SSK-MV




1295 - 1305


Specification

Tow Hitch Type: Ball	Suspension:	Yes	Jockey Wheel:	Yes
Wheel Quantity: 2	Brakes:	No	Mudguards:	Yes
Wheel Size: 10 inch	Handbrake:	No	Tail Lights:	Yes
Tyre Size: 145/80 R10	Breakaway Cable:	No		

Dimensions (Trailer)

Length: 2650 mm	Width:	1300 mm	Height:	700 mm
Weight:	135 kg	Max. Load / Be	d Weight:	615 kg
Max. Bed Area:	815 mm ²	Max. Gross Ve	hicle Weight (G	VW): 750 kg



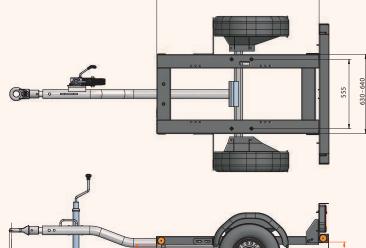

725 - 775

2450 - 2600

2500 - 2650

Designed in the UK.

1850 - 2000

For more details call **MHM TODAY** on **0808 168 9099**

Email sales@mhmplant.com or visit us at www.mhmplant.com

*T&Cs apply. Picture shown for illustration purposes only. Actual product may differ in appearance. All specifications are subject to change.

()

625 - 675