

RT4-3500kg

Twin Axle Braked Trailer



Maximum towable

Suitable for most brands of generator up to 100kVA,* including the following MHM models:

STAGE 5 ENGINE

MGTP 60 SSKH-5 MGTP 100 SSKH-5

STAGE 3 ENGINE

MGTP 60 SSF MGTP 100 SSF

Suitable for most brands of generators and other static plant such as tanks, pumps, compressors and other.

Optional



Ready for work rolling chassis

Towable chassis is fully certified and approved and is recorded on a data base in accordance with Regulation 2007/46/EC

Open frame design

The design is approved for various load fastening variations

Chassis is complete with mudguards, brakes and rear lights

Features Benefits

Simply load and secure your equipment and go

No further testing or certification is required as the standard issue certification satisfies all the elements of trailer legislation and chassis can be legally and safely towed with, or without a pay load

Simply fasten and secure your generator or equipment on and off the chassis with eas

Choose from ratchet straps o nut and bolts fasteners as both are acceptable

Trailer is suitable for UK and Ireland highway use



Specification

Tow Hitch Type	: Ball
Wheel Quantit	y: 4
Wheel Size:	14 inch
Tyre Size:	185 R14 C


Suspension:	Yes
Brakes:	Yes
Handbrake:	Yes
Breakaway Cable:	Yes

Jockey Wheel:	Yes
Mudguards:	Yes
Tail Lights:	Yes


Dimens	ions (Trailer)
Lanath	4000 mm

Lengin.	4000 111111	wiutii.	1040
Weight:		580 kg	Max.
Max. Bed Ar	ea:	4100 mm ²	Max.


			-0
	1840 mm	Heigh	nt: 825 mm
	Max. Load / Bed Weight:		: 2920 kg
Max. Gross Vehicle Weight (GVW): 3500		ight (GVW): 3500 kg	

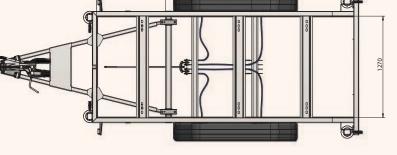

1944



\Midth-

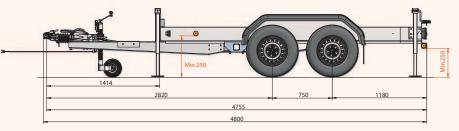

For more details call MHM TODAY

on **0808 168 9099**

Email sales@mhmplant.com or visit us at www.mhmplant.com











